

NEXT GENERATION HIGH PERFORMANCE GNSS RECEIVER

DESIGNED WITH THE FUTURE IN MIND


The OEM628 tracks all current Global Navigation Satellite System (GNSS) constellations including GPS, GLONASS, Galileo, BeiDou and QZSS. It features configurable channels to optimize satellite availability in any condition, no matter how challenging. The OEM628 is software upgradable to track future signals as they become available. Maximizing satellite availability and optimizing GNSS signal usage now, and in the future, ensures consistent, high performance GNSS positioning.

EASY SYSTEM INTEGRATION

The OEM628 is designed and built with a focus on product quality and ease of integration. It maintains our industry setting OEMV-2 form factor, ensuring easy drop-in replacement, and provides a backward compatible command and log interface for existing customers. An integrator's development kit and user friendly configuration software are available to assist new customers with integration, enabling faster time to market. NovAtel's well established, comprehensive set of software commands also facilitates system integration. Ethernet and NTRIP 2.0 Client and Server connectivity is offered in addition to our traditional communications interfaces.

FLEXIBLE CONFIGURATIONS FOR YOUR APPLICATION

Proven, innovative NovAtel technology combines to achieve the best in GNSS positioning. NovAtel's industry leading Pulse Aperture Correlator (PAC) multipath mitigation technology is standard and ensures the highest quality measurements and positioning. The OEM628 provides excellent resistance to interference for consistent, accurate and reliable positioning. Configurable options ensure your positioning and accuracy needs are always met. To learn more about how our firmware options can enhance your positioning, please visit www.novatel.com/products/firmware-options.

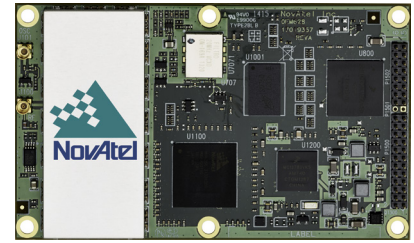

BENEFITS

- + Innovative OEM6® technology
- + Supports current and future GNSS signals
- + Application based configurations
- + Designed for rapid integration

FEATURES

- + Low power consumption
- + Flexible communication interfaces
- + Software configurable performance
- + High position accuracy and availability
- + SPAN® INS functionality

OEM628™

PERFORMANCE¹

Channel Configuration

120 Channels²

Signal Tracking

GPS L1, L2, L2C, L5
GLONASS L1, L2
BeiDou³ B1, B2
Galileo E1, E5a, E5b, AltBOC
SBAS
QZSS
L-Band

Horizontal Position Accuracy (RMS)

Single point L1	1.5 m
Single point L1/L2	1.2 m
SBAS ⁴	0.6 m
DGPS	0.4 m
NovAtel CORRECT™	
» TERRASTAR-D ⁵	6 cm
» Veripos Apex ^{2 6}	6 cm
» RT-2 [®]	1 cm + 1 ppm
Initialization time	<10 s
Initialization reliability	> 99.9%

Measurement Precision (RMS)

Fully independent code and carrier measurements:

	GPS	GLO
L1 C/A code	4 cm	8 cm
L1 carrier phase	0.5 mm	1 mm
L2 P(Y) code ⁷	8 cm	8 cm
L2 carrier phase ⁷	1 mm	1 mm
L2C code ⁸	8 cm	8 cm
L2C carrier phase ⁸	1 mm	1 mm
L5 code	3 cm	-
L5 carrier phase	0.5 mm	-

Maximum Data Rate⁹

Measurements	100 Hz
Position	100 Hz

Time to First Fix

Cold start ¹⁰	<50 s
Hot start ¹¹	<35 s

Signal Reacquisition

L1	<0.5 s (typical)
L2	<1.0 s (typical)

Time Accuracy¹² 20 ns RMS

Velocity Accuracy

0.03 m/s RMS

Velocity Limit¹³ 515 m/s

PHYSICAL AND ELECTRICAL

Dimensions 60 x 100 x 9 mm

Weight 37 g

Power

Input voltage¹⁴ +3.3 VDC ±5%

Power consumption¹⁵ 1.3 W

Antenna LNA Power Output

Output voltage 5 VDC ±5%

Maximum current 100 mA

Connectors

Main 24-pin dual row male header

Aux 16-pin dual row male header

Antenna input MMCX female

External oscillator input MMCX female

COMMUNICATION PORTS

1 RS-232/RS-422 up to 921,600 bps

2 LVTTTL up to 921,600 bps

2 CAN Bus¹⁶ 1 Mbps

1 USB port 12 Mbps

1 LAN Ethernet port supporting:

» 10 BaseT/100BaseT networks

» Direct TCP/IP & UDP connectivity

» NTRIP (v2.0) client and server

Pulse Per Second (PPS) output

Event marker input support

ENVIRONMENTAL

Temperature

Operating -40°C to +85°C

Storage -40°C to +85°C

Humidity 95% non-condensing

Vibration

Random MIL-STD 810G (Cat 24, 7.7 g RMS)

Sinusoidal IEC 60068-2-6

Acceleration (operating)

MIL-STD 810G, Method 513.6 Procedure II (16 g)

Bump ISO 9022-31-06 (25 g)

Shock MIL-STD-810G (40 g) Survival (1000 g)

FEATURES

- Field upgradeable software
- 20 Hz measurement and position data rate
- PAC multi-path mitigating technology
- Differential GPS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, CMR, CMR+ and RTCA
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Auxiliary strobe signals, including a configurable 1 PPS output for time synchronization and mark inputs
- Outputs to drive external LEDs
- External oscillator input

NOVATEL CONNECT™

NovAtel Connect is an intuitive configuration and visualization tool suite allowing comprehensive control of the OEM628 product.

- Easy to use wizards for positioning mode configuration and raw data collection
- Detailed GUI for comprehensive status information
- Plan view and playback files allow monitoring the positioning and configuration history
- Remotely control and monitor the OEM628 over the internet
- Windows XP and Windows 7 platforms

FIRMWARE OPTIONS

- ALIGN[®]
- GLIDE™
- RAIM
- 100 Hz output rate⁹
- RT-2
- SPAN

OPTIONAL ACCESSORIES

- GPS-700 series antennas
- ANT series antennas
- RF cables-5, 10 and 30 m lengths
- OEM6 Development Kit

HIGH VIBRATION HARDWARE

The OEM628 is available as a High Vibration TCXO hardware variant, the OEM628V. This is compliant with MIL-STD 810G (category 24, 20 g RMS).